

TECHNICAL CARD



LED Rechargeable Desk Lamp with White Noise



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VL-TF23G**WARRANTY 2 YEARS****General parameters**

Light source replaceable	no
--------------------------	----

Type of light source

Dimmable	non-step dimming
Technology	LED

Electrical parameters

Maximum power	8.5 W
Rated voltage, frequency	DC 5 V
Rated current	1.7 A
Input interface	USB-C
Electric shock protection class	III

Photometric parameters

Luminous flux	150 Lm
Correlated color temperature	4000K (neutral white), RGB
Beam angle	120°

Color rendering index (CRI)	Ra > 90
Lifetime (L70B50)	30000 h
On/Off cycles	15000

Additional information

Place of installation	Desk
Place of application	indoor
Housing colour	Green
Battery capacity	1800 mAh
Battery type	LiFePO4
Ultraviolet radiation	no
Battery replaceable	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum, ABS

Dimensions

EAN	4823135400219
Height	160 mm
Width	405 mm
Depth	160 mm
In the package	1 pc.
Outer box	6 pcs.
Unit nett weight	536g

VIDEX®

VIDEX VL-TF23G 4000K+RGB Green


INDEX: VL-TF23G

Signs marking goods


Packaging marking

Recycling of
waste, CE,
Utilization

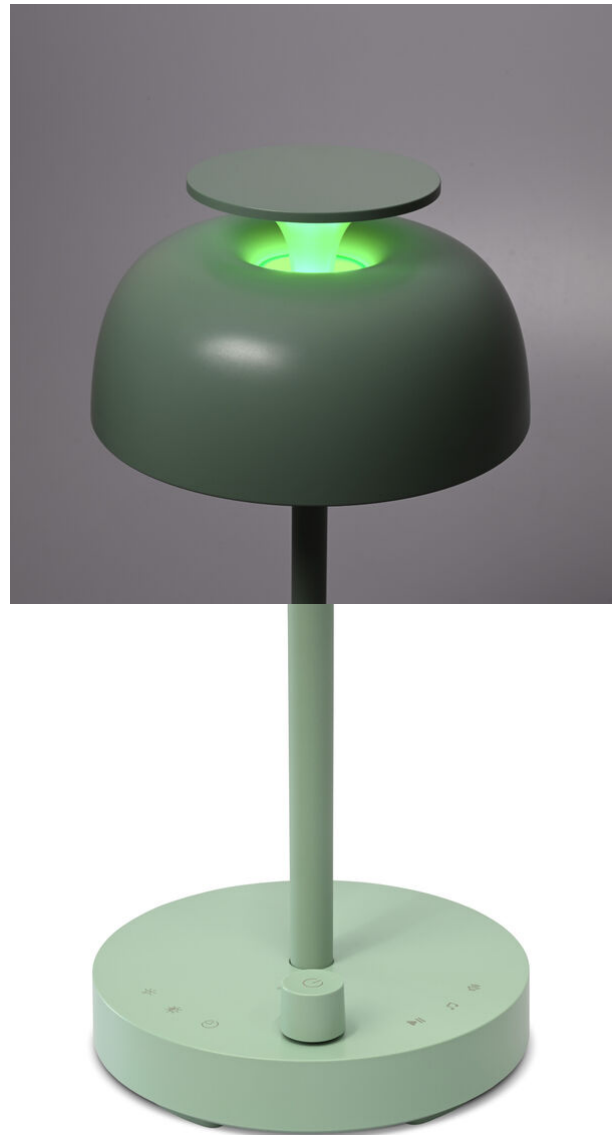

VIDEX[®]**VIDEX VL-TF23G 4000K+RGB Green****INDEX: VL-TF23G**

INDEX: VL-TF23G

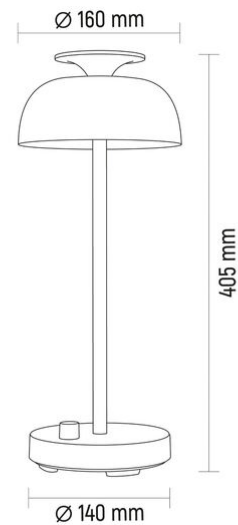

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VL-TF23G


The product must be used indoors



Class III protection against electric shock - ensured by supplying a specific product with a safe very low voltage (SELV) without the risk of creating a voltage above safe levels



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



120°

— Rated beam angle



Ra ≥ 90

— Ra > 90 - color rendering index



30 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



-20° +40°C

— Operating temperatures range



Dimmable

— The product has smooth brightness adjustment



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture.
Protection against solid objects larger than 12 mm; no protection against moisture