

TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VLE-GX53-08533



Ra ≥ 80



ON/OFF



20 000 h



Not Dimmable



-20° +40°C



CCT 3000K



No Flicker



No Flicker



Free



IP20

WARRANTY 2 YEARS

WARM WHITE



3000K

Warm White / Ciepła biel / Tepla bila / Blanc chaud /
Tepla biela / Warm wit / Meleg feher / Topla bela / Topla
bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe
valge / Тепло бяла / Bianco caldo.

General parameters

Light source or containing product	Light source
------------------------------------	--------------

Type of light source

Energy class of the light source	F
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No
Technology	LED

Electrical parameters

On-mode power (Pon)	8 W
Rated voltage, frequency	AC 175-250 V, 50/60 Hz
Rated current	69 mA
Energy consumption in on-mode of the light source (kWh/1000h)	8
Displacement factor (cos φ1)	0.5
Survival factor	0.9

Photometric parameters

Useful luminous flux (Φuse)	730 Lm
Correlated color temperature	3000K (warm white)
Peak luminous intensity	-
Beam angle	140°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime	20000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.44
Chromaticity coordinates (y)	0.4
R9 colour rendering index value	>0
The lumen maintenance factor	≥94.8%
Colour consistency in MacAdam ellipses (SDCM)	<6 (3000K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	≤0.4

CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of application	indoor
Housing colour	White
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20

Dimensions


EAN	5904405542606
Height	74 mm
Depth	26 mm
Width	74 mm
In the package	1 pc.
Outer box	10 pcs., 100 pcs.
Unit nett weight	46g

Signs marking goods

Packaging marking

Recycling of waste, CE, Not suitable for use under moisture, Utilization



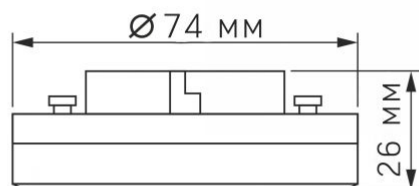

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



Not suitable for use under moisture



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— Ra > 80 – color rendering index



— Rated On/off cycles



— Nominal lifetime (hours)



— The product is incompatible with light regulators



— Operating temperatures range



— Colour consistency in MacAdam ellipses (SDCM)



— The flickering of the light does not exceed the permissible level



— The product has minimal flickering, which should not cause discomfort or danger



— The product does not contain mercury



— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture