

TECHNICAL CARD



PIR motion and light sensor

VIDEX®



Free



-20° +40°C



IP65

WARRANTY 3 YEARS

Electrical parameters

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Input interface	Terminal block
Electric shock protection class	II
Standby Power (Psb)	<0.6 W

Photometric parameters

Sensor light threshold	3-2000 Lx
------------------------	-----------

Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor, outdoor
Motion sensor	yes
Sensor type	PIR
Sensor detection angle	160°, 45°
Sensor time delay	10 s - 15 min
Sensor detection distance	2 - 12 m
Housing colour	White
Ultraviolet radiation	no
Operating temperature range	-20° +40°C

VIDEX VL-SPW15W 1200W IP65 White

INDEX: VL-SPW15W

Ingress protection	IP65
Housing material	PC


Dimensions

EAN	4820246488525
Height	51.5 mm
Width	80 mm
Depth	119.5 mm
In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	160g

Signs marking goods

Packaging marking	CE, Utilization
-------------------	-----------------

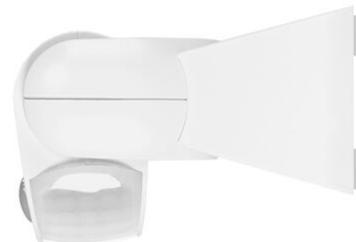


VIDEX®**VIDEX VL-SPW15W 1200W IP65 White****INDEX: VL-SPW15W**

VIDEX®

VIDEX VL-SPW15W 1200W IP65 White

INDEX: VL-SPW15W

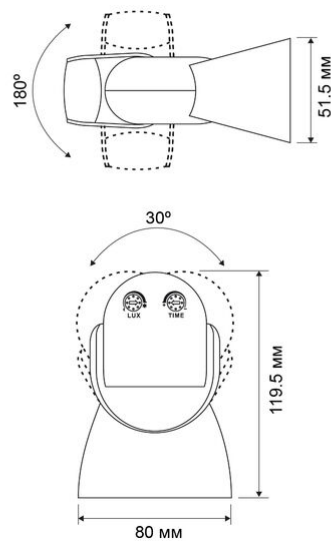

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VL-SPW15W



The product must be used indoors



The product must be used outdoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The product does not emit ultraviolet light



— Operating temperatures range



— Class of protection against dust and moisture.
The product has full protection against dust and water jets from all directions