

TECHNICAL CARD



LED Recessed-mounted Panel



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VL-Pb36CW

WARRANTY 3 YEARS
General parameters

Light source or containing product	Containing product
Light source replaceable	by the producer
Control gear replaceable	by a qualified specialist

Type of light source

Energy efficiency class of the contained light source	B
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	yes
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No
Technology	LED

Electrical parameters

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	180 mA
Input interface	Terminal block
Electric shock protection class	III
Displacement factor (cos φ1)	0.9
Survival factor	0.9
Energy consumption in on-mode of the light source (kWh/1000h)	36

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	6700 Lm
Correlated color temperature	6000K (cold white), 4000K (neutral white), 3000K (warm white)
Beam angle	160°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source reference	in a sphere (360°)
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Flicker metric (Pst LM)	-
Stroboscopic effect metric (SVM)	-

INDEX: VL-Pb36CW

Colour consistency in MacAdam ellipses (SDCM) <6 (3000K),
<6 (4000K),
<6 (6000K)

CRI Min Ra 80

CRI Max Ra 88

Additional information

Place of installation Armstrong
ceiling,
Ceiling

Place of application indoor

Housing colour White

Diffuser material Polystyrene
(PS)

Ultraviolet radiation no

Operating temperature range -20° +40°C

Suitable for installation in normally flammable surfaces yes

Mercury content Does not
contain

Ingress protection IP20

Housing material Aluminum,
Iron alloy

Dimensions

EAN 4820246487825

In the package 1 pc.

Height 595 mm

Outer box 6 pcs.

Width 595 mm

Depth 28 mm

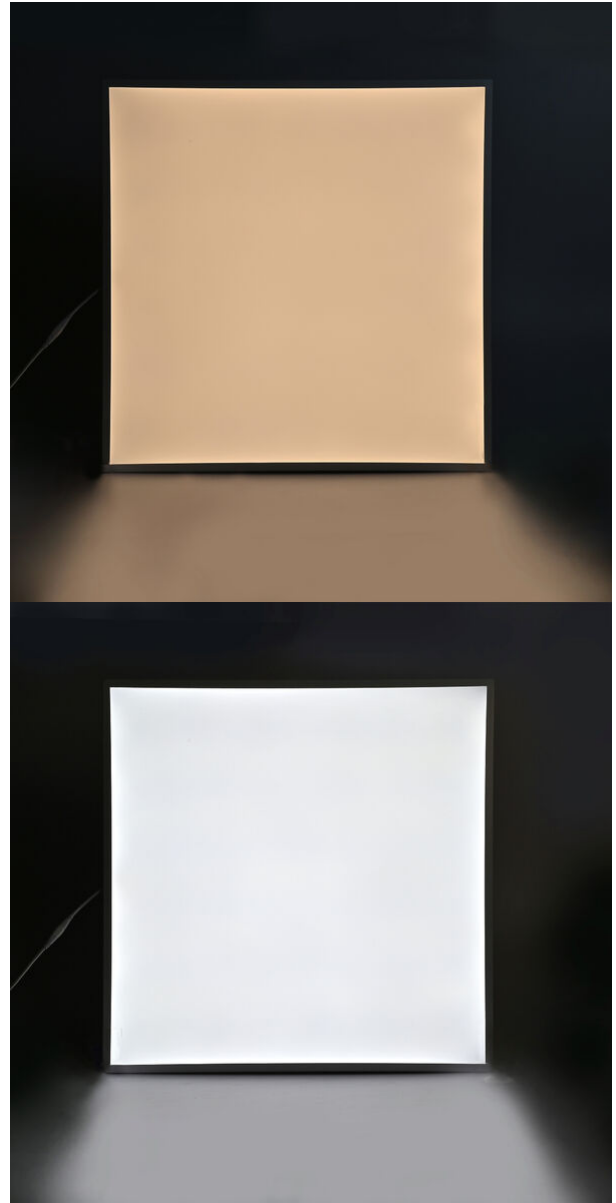
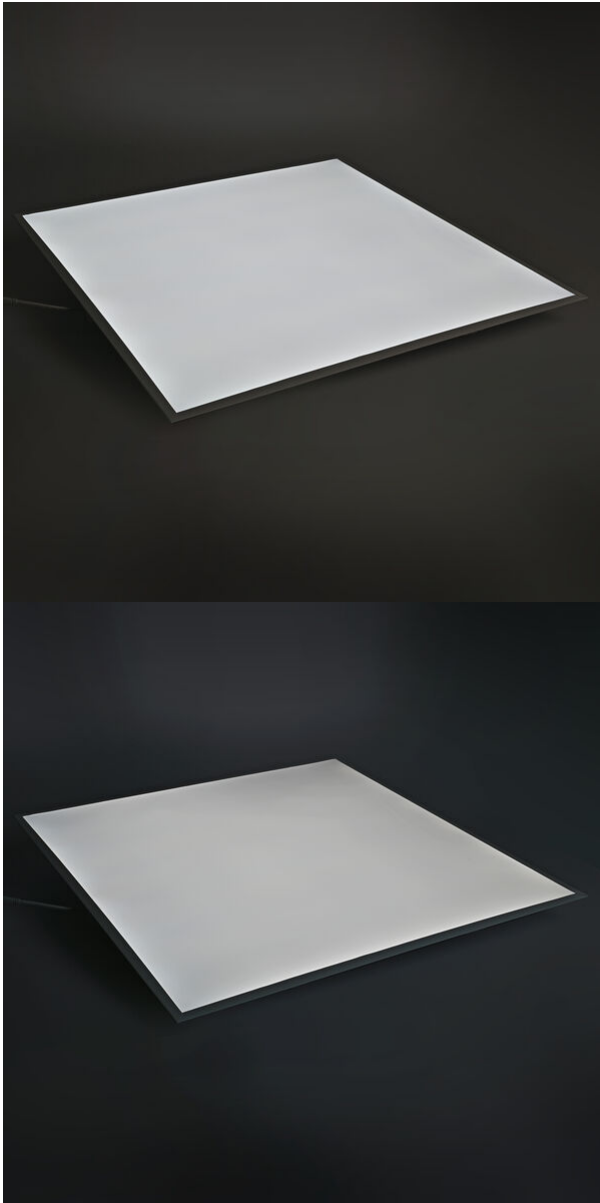
Unit nett weight 1.35kg

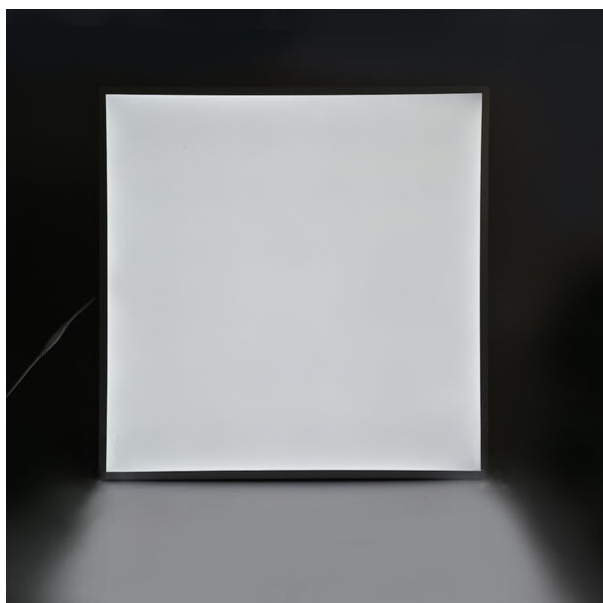
Signs marking goods
Packaging marking

CE, Utilization



VIDEX®**VIDEX VL-PB36CW 36W 3000-4000-6000K****INDEX: VL-Pb36CW**

VIDEX®**VIDEX VL-PB36CW 36W 3000-4000-6000K****INDEX: VL-Pb36CW**

INDEX: VL-Pb36CW


We reserve the right to make technical changes. The data contained in this material is

not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Class III protection against electric shock - ensured by supplying a specific product with a safe very low voltage (SELV) without the risk of creating a voltage above safe levels



The product can be installed and used in/on normally flammable surfaces



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Ra > 80

— Ra > 80 - color rendering index



20 000

— Rated On/off cycles



30 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



CCT 3000K

— Colour consistency in MacAdam ellipses (SDCM)



CCT 4000K

— Colour consistency in MacAdam ellipses (SDCM)



CCT 6000K

— Colour consistency in MacAdam ellipses (SDCM)



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture