

## TECHNICAL CARD



Rechargeable Mushroom LED Table Lamp



330°



Ra ≥ 80



30 000 h



Free



Dimmable



Free



IP44

## WARRANTY 2 YEARS

### General parameters

|                          |    |
|--------------------------|----|
| Light source replaceable | no |
|--------------------------|----|

### Type of light source

|          |                  |
|----------|------------------|
| Dimmable | non-step dimming |
|----------|------------------|

|            |     |
|------------|-----|
| Technology | LED |
|------------|-----|

### Electrical parameters

|               |     |
|---------------|-----|
| Maximum power | 4 W |
|---------------|-----|

|                          |        |
|--------------------------|--------|
| Rated voltage, frequency | DC 5 V |
|--------------------------|--------|

|               |       |
|---------------|-------|
| Rated current | 0.8 A |
|---------------|-------|

|                 |       |
|-----------------|-------|
| Input interface | USB-C |
|-----------------|-------|

|                                 |     |
|---------------------------------|-----|
| Electric shock protection class | III |
|---------------------------------|-----|

### Photometric parameters

|               |        |
|---------------|--------|
| Luminous flux | 210 Lm |
|---------------|--------|

|                              |                                                                    |
|------------------------------|--------------------------------------------------------------------|
| Correlated color temperature | 6500K (cold white), 4500K (neutral white), 3000K (warm white), RGB |
|------------------------------|--------------------------------------------------------------------|

## VIDEX VL-TF25BG 3000-6500K + RGB

### INDEX: VL-TF25BG

|                             |         |
|-----------------------------|---------|
| Beam angle                  | 330°    |
| Color rendering index (CRI) | Ra > 80 |
| Lifetime (L70B50)           | 30000 h |
| On/Off cycles               | 15000   |

### Additional information

|                             |                   |
|-----------------------------|-------------------|
| Place of installation       | Desk              |
| Place of application        | indoor            |
| Housing colour              | Beige             |
| Battery capacity            | 2400 mAh          |
| Battery type                | LiFePO4           |
| Ultraviolet radiation       | no                |
| Battery replaceable         | no                |
| Operating temperature range | -15° +45°C        |
| Mercury content             | Does not contain  |
| Ingress protection          | IP44              |
| Housing material            | Plastic, Silicone |

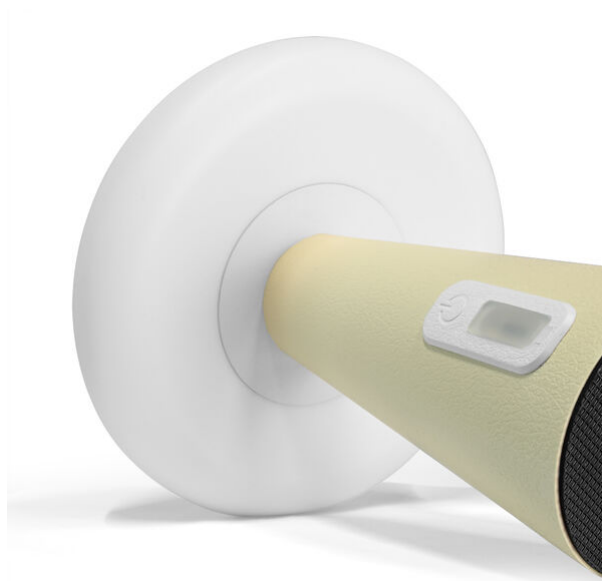
### Dimensions

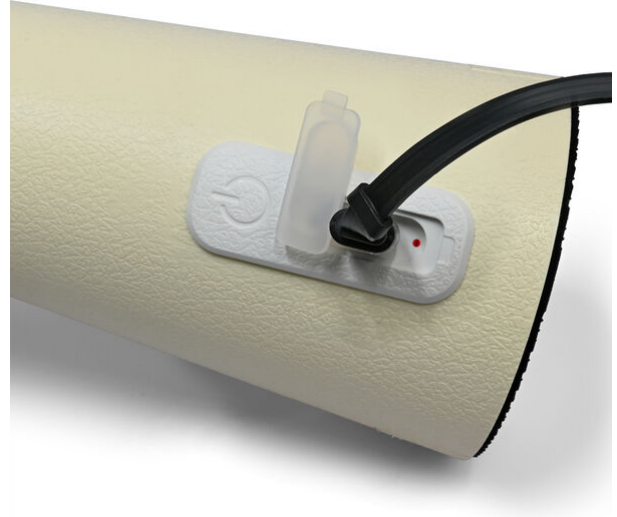
|                  |               |
|------------------|---------------|
| EAN              | 4823135400929 |
| Height           | 221 mm        |
| Width            | 150 mm        |
| Depth            | 150 mm        |
| In the package   | 1 pc.         |
| Outer box        | 12 pcs.       |
| Unit nett weight | 520g          |

**VIDEX®**

VIDEX VL-TF25BG 3000-6500K + RGB

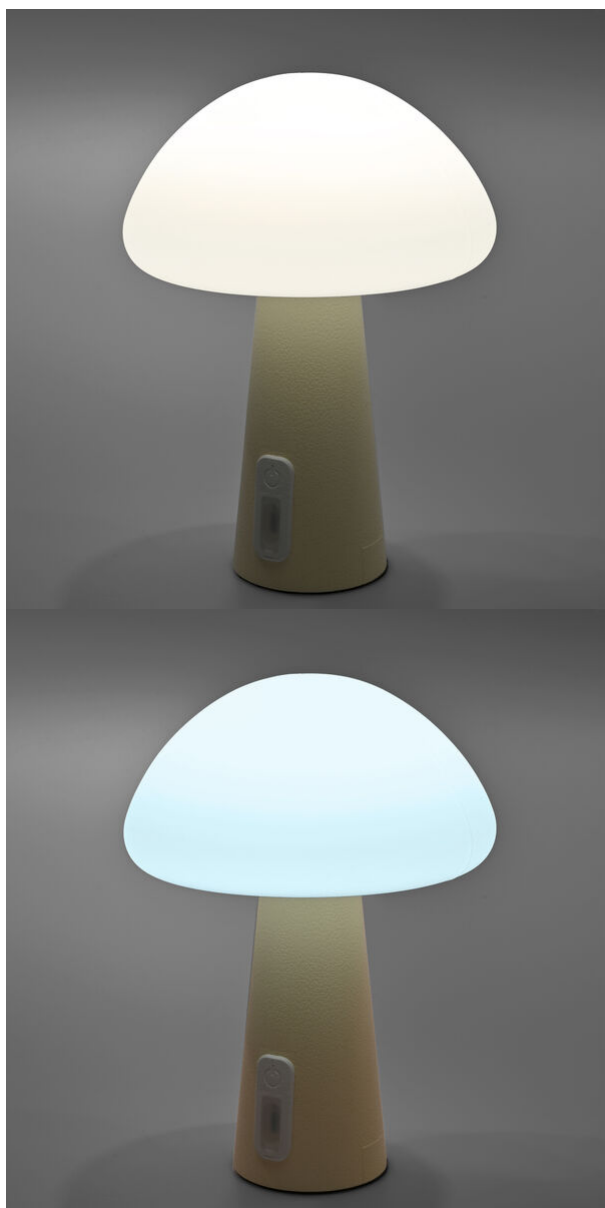
**INDEX: VL-TF25BG****Signs marking goods****Packaging marking**Recycling of  
waste, CE,  
Utilization

**VIDEX®****VIDEX VL-TF25BG 3000-6500K + RGB****INDEX: VL-TF25BG**

**VIDEX®****VIDEX VL-TF25BG 3000-6500K + RGB****INDEX: VL-TF25BG**

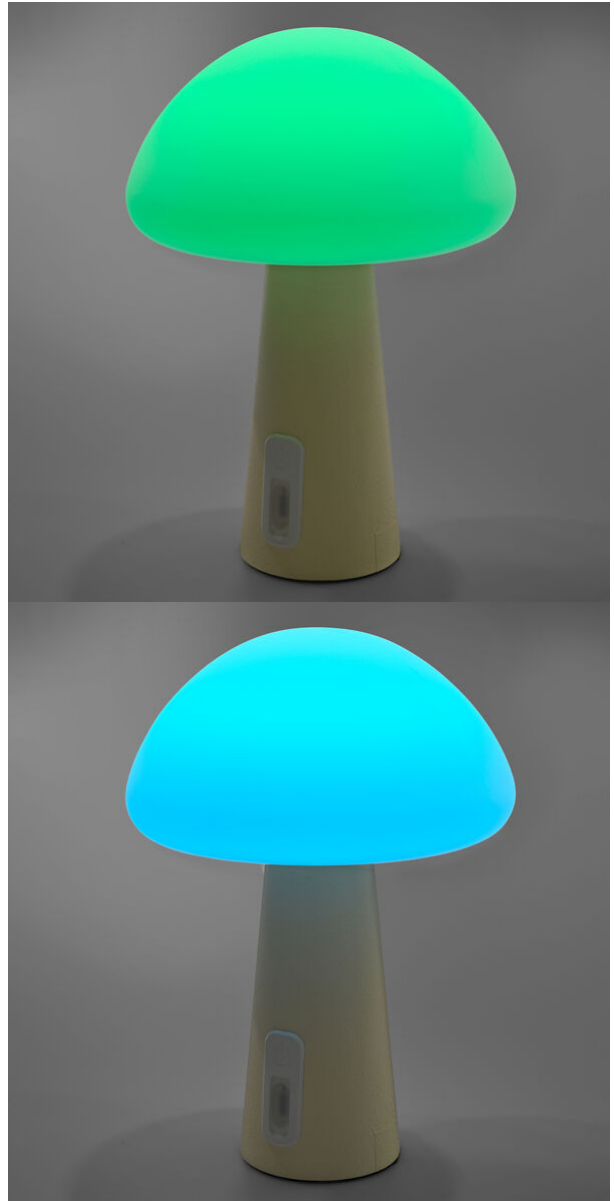
**VIDEX®**

VIDEX VL-TF25BG 3000-6500K + RGB

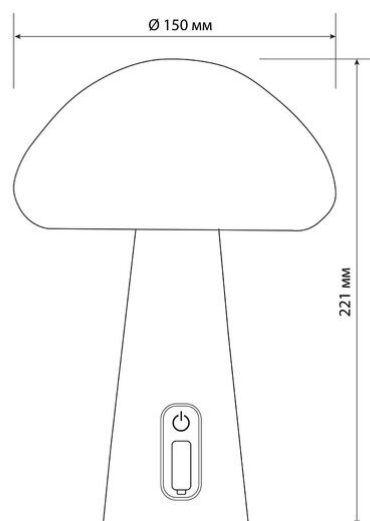
**INDEX: VL-TF25BG**

**VIDEX<sup>®</sup>**

VIDEX VL-TF25BG 3000-6500K + RGB

**INDEX: VL-TF25BG**

## INDEX: VL-TF25BG



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Class III protection against electric shock - ensured by supplying a specific product with a safe very low voltage (SELV) without the risk of creating a voltage above safe levels



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Rated beam angle



Ra > 80 - color rendering index



Nominal lifetime (hours)



The product does not emit ultraviolet light



The product has smooth brightness adjustment



The product does not contain mercury



Class of protection against dust and moisture. Protection against solid foreign objects with a diameter of 1 mm and greater and against water splashes