Plug-in motion detector, 120°, IP20, 280W, Schuko

Marka: **Virone** | Symbol: **MS-1(GS)** | Ean: **5908254817243**



PRODUCT DESCRIPTION

An electrical device that is installed in a standard wall socket. Thanks to the use of a PIR sensor, the device helps to automate the switching on and off of electrical devices after motion detection. The receivers are switched on at the appropriate daylight intensity.

ORNO GROUP Sp. z o. o. All rights reserved.

TECHNICAL DATA

General information:


Type of sensor:	Infrared
Detection angle:	120°
Detection range:	9 m
Nominal voltage:	230V~, 50Hz
Max. load:	1200 W
Max. load of the LED light source:	300 W
Degree of protection (IP):	20
Colour:	white
Adjustable daylight sensor (LUX):	Yes
Adjustable time setting (TIME):	Yes
Adjustment of motion detection range (SENS):	Yes
Relay output:	No
Presence detector:	No
Working temperature:	-20~+40
Installation:	To the Schuko socket
Dimensions - width:	45 mm
Dimensions - height:	98.3 mm
Dimensions - depth:	81.5 mm
Lighting time adjustment range (TIME):	min.: 10 sek. ± 3 sek., max.: 15min.±2min
Daylight sensor adjustment range (LUX):	<3—2000lux
Other features:	SENS detection range adjustment: 2-9M

ORNO GROUP Sp. z o. o. All rights reserved.







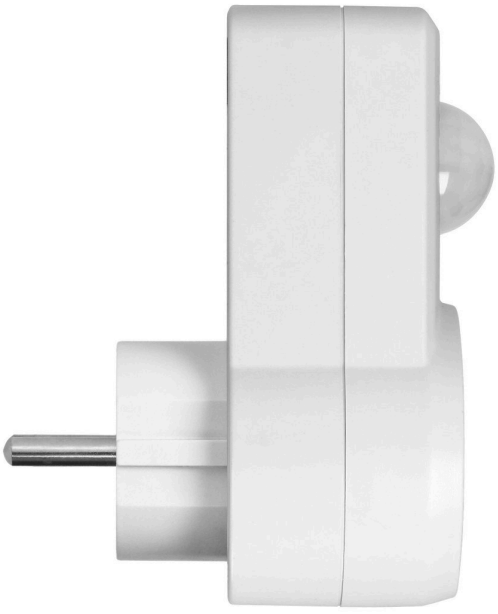

ORNO GROUP Sp. z o. o. All rights reserved.





ORNO GROUP Sp. z o. o. All rights reserved.