# Microwave sensor 360°

Marka: **Orno** | Symbol: **OR-CR-208** | Ean: **5907565612332**




## PRODUCT DESCRIPTION

Microwave (radar) motion sensor with low power emission For indoor usage Collaborates with LED lighting Regulation: lighting time (TIME), the sensitivity of the light intensity (LUX) and the range of motion detection (SENS) Designed for installation in luminaires Built-in twilight sensor and timer Temperature does not affect the detection.

ORNO GROUP Sp. z o. o. All rights reserved.

## TECHNICAL DATA

### General information:

| | |
|---|---|
| **Max. load:** | 1200 |
| **Max. load of the LED light source:** | 300 W |
| **Degree of protection (IP):** | 20 |
| **Relay output:** | Yes |
| **Nominal voltage:** | 230V~, 50Hz |
| **Presence detector:** | No |
| **Colour:** | white |
| **Installation:** | surface mounting |
| **Dimensions of the sensor - width (mm):** | 46,53 mm |
| **Dimensions of the sensor - height (mm):** | 77,7 mm |
| **Dimensions of the sensor - depth (mm):** | 44 mm |
| **Working temperature:** | -20~+50 |
| **Detection angle:** | 360° |
| **Type of sensor:** | microwave |
| **Detection range:** | 1-8m m |
| **Adjustable daylight sensor (LUX):** | Yes |
| **Daylight sensor adjustment range (LUX):** | <3—2000lux |
| **Adjustable time setting (TIME):** | Yes |
| **Lighting time adjustment range (TIME):** | min: 10 sek. ± 3 sek.; max: 12 min. ± 1 min. |
| **Adjustment of motion detection range (SENS):** | Yes |

ORNO GROUP Sp. z o. o. All rights reserved.













ORNO GROUP Sp. z o. o. All rights reserved.

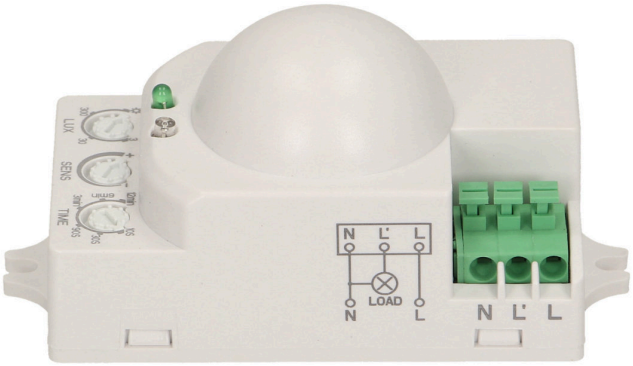





ORNO GROUP Sp. z o. o. All rights reserved.